


CV2 SILICONE 2-PLY WIRE REINFORCED HOSE

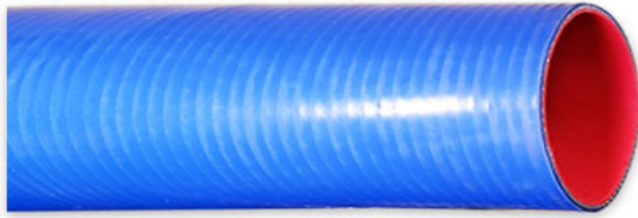


The CV2 adds a 2nd ply of helically-wound wire to the polyester fabric increases pressure ratings and resists kinking. Great for hostile environments.

Standard lengths of 3, 6, 9, and 12 feet. 1/2" to 6" diameters.

-65F to 350F.

QTY	INNER DIA	OUTER DIA	OAL	NOTES	WT/FT	PRESSURE	VAC
	(in)	(in)	(ft)		(lbs)	(psi)	(in hg)
	1/2				0.20	200	30
	3/4				0.25	200	30
	1				0.30	175	30
	1 1/4				0.37	160	30
	1 1/2				0.43	160	30
	1 3/4				0.50	150	30
	2				0.56	140	30
	2 1/4				0.64	125	30
	2 1/2				0.71	100	30
	2 3/4				0.78	100	30
	3				0.83	100	30
	3 1/2				0.97	85	30
	4				1.11	75	30
	5				1.38	40	30
	6				1.65	35	30

NOTES: Temperature Range -65F to 350F.

CUSTOMER _____ PROJECT _____ ENGINEER _____ CONTRACTOR _____ CERTIFICATION _____	 HOSECRAFT USA				
	<table border="1" style="width: 100%;"> <tr> <td style="width: 60%;">MODEL:</td> <td style="text-align: center;">CV2</td> </tr> <tr> <td>DRAWN BY: PDB 11/1/19</td> <td style="text-align: center;">SILICONE 2- PLY WIRE</td> </tr> </table>	MODEL:	CV2	DRAWN BY: PDB 11/1/19	SILICONE 2- PLY WIRE
MODEL:	CV2				
DRAWN BY: PDB 11/1/19	SILICONE 2- PLY WIRE				