


CV3 SILICONE 3-PLY WIRE REINFORCED HOSE

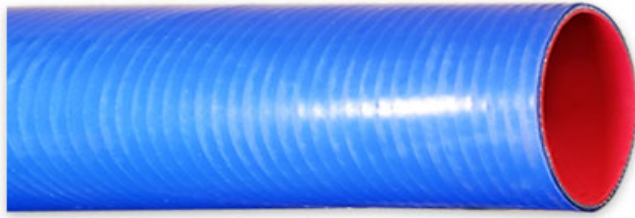

The CV3 has a 3-Ply polyester fabric reinforcement with special coating. Meets SAEJ20R1 Class A Standard Wall. Ideal for extreme temperatures and high performance for coolant and other chemicals.

Standard lengths of 3ft and 12ft. Wide variety of diameter variations from 1/2" to 6".

QTY	INNER DIA	OUTER DIA	OAL	PRES	WT/FT	NOTES
	(in)	(in)	(ft)	(psi)	(lbs)	
	1/2	0.87		115	0.15	
	5/8	1.00		90	0.19	
	3/4	1.12		80	0.24	
	7/8	1.25		80	0.28	
	1	1.37		75	0.32	
	1 1/8	1.50		75	0.37	
	1 1/4	1.62		65	0.42	
	1 3/8	1.75		65	0.47	
	1 1/2	1.87		60	0.53	
	1 5/8	2.00		60	0.58	
	1 3/4	2.12		55	0.63	
	2	2.37		50	0.74	
	2 1/8	2.50		50	0.77	
	2 1/4	2.62		40	0.80	
	2 3/8	2.75		40	0.86	
	2 1/2	2.87		35	0.92	
	2 5/8	3.00		35	0.95	
	2 3/4	3.12		30	0.98	
	3	3.37		25	1.04	
	3 1/4	3.62		25	1.10	
	3 1/2	3.87		15	1.15	
	3 3/4	4.12		10	1.18	
	4	4.37		10	1.21	
	4 1/2	4.87		10	1.27	
	5	5.37		10	1.33	
	6	6.32		8	1.92	

NOTES: Temperature Range -65F to 350F.

CUSTOMER _____
 PROJECT _____
 ENGINEER _____
 CONTRACTOR _____
 CERTIFICATION _____



MODEL:	CV3
DRAWN BY: PDB 11/1/19	SILICONE 3-PLY