


CV4 SILICONE 4-PLY WIRE REINFORCED HOSE

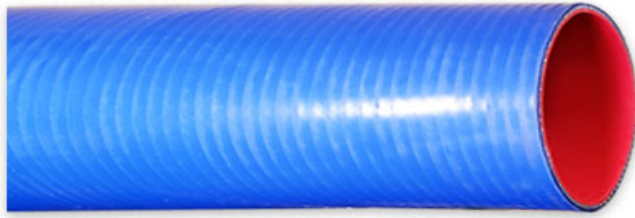


The CV4 has a 4-Ply polyester fabric reinforcement with special coating. Meets SAEJ20R1 Class A Heavy Wall. Ideal for extreme temperatures and high performance for coolant and other chemicals.

Standard lengths of 3ft and 12ft. Wide variety of diameter variations from 1/2" to 6".

QTY	INNER DIA	OUTER DIA	OAL	PRES	WT/FT	NOTES
	(in)	(in)	(ft)	(psi)	(lbs)	
	1/2	0.89		115	0.15	
	5/8	1.02		90	0.19	
	3/4	1.14		80	0.24	
	7/8	1.27		80	0.28	
	1	1.37		75	0.32	
	1 1/4	1.64		65	0.42	
	1 3/8	1.77		65	0.47	
	1 1/2	1.89		60	0.53	
	1 5/8	2.02		60	0.58	
	1 3/4	2.14		55	0.63	
	2	2.37		50	0.74	
	2 1/4	2.64		40	0.80	
	2 3/8	2.77		40	0.86	
	2 1/2	2.89		35	0.92	
	2 5/8	3.00		35	0.95	
	2 3/4	3.14		30	0.98	
	3	3.39		25	1.04	
	3 1/4	3.64		25	1.10	
	3 1/2	3.89		15	1.15	
	3 3/4	4.14		10	1.18	
	4	4.37		10	1.21	
	4 1/2	4.89		10	1.27	
	5	5.37		10	1.33	
	6	6.39		8	1.92	

NOTES: Temperature Range -65F to 350F.

CUSTOMER _____ PROJECT _____ ENGINEER _____ CONTRACTOR _____ CERTIFICATION _____					
	<table border="1" style="width: 100%;"> <tr> <td style="width: 70%;">MODEL:</td> <td style="text-align: center;">CV4</td> </tr> <tr> <td>DRAWN BY: PDB 11/1/19</td> <td style="text-align: center;">SILICONE 4-PLY</td> </tr> </table>	MODEL:	CV4	DRAWN BY: PDB 11/1/19	SILICONE 4-PLY
MODEL:	CV4				
DRAWN BY: PDB 11/1/19	SILICONE 4-PLY				