


MP2 COMPOSITE SPECIAL PETROLEUM HOSE

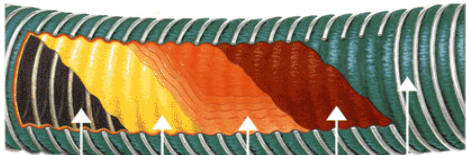

COMPOSITION

The Model MP2 composite special petroleum hose is designed for the transfer of a wide range of petroleum products, including those with modern gasoline additives, ethanol, JP aviation fuels, and 100% benzene.

This premium hose is designed for full suction, and is lightweight, flexible, and easy to handle. It is constructed with multiple plies of polypropylene films and polyester vapor barriers, which lead to "fail safe" safety. The multiple layers of construction require a serpentine path for liquid to leak, preventing sudden catastrophic failure. Special crimped fittings also result in leak free assemblies every time

QTY	INNER DIA	OAL	FITTINGS	WORKING PRES	BURST PRES	BEND RADIUS	WEIGHT
	(in)	(in)		(psi)	(psi)	(in)	(lbs/ft)
	1			200	800	4.1	0.6
	1 1/2			200	800	5.1	0.8
	2			200	800	6.1	1.6
	3			200	800	8.2	2.4
	4			250	800	11	3.2
	6			250	1000	22	7.2
	8			250	1000	30	11

NOTES: THE HOSE IS RATED FROM -40F TO 250F.
Standard with high tensile galvanized steel inner and outer helix.

CUSTOMER _____	 HOSECRAFT USA	
PROJECT _____		
ENGINEER _____		
CONTRACTOR _____		
CERTIFICATION _____		
	MODEL:	MP2
	DRAWN BY: PDB 1/1/05	COMPOSITE SPECIAL PETROLEUM HOSE