


## PV3 POLYETHYLENE VACUUM HOSE

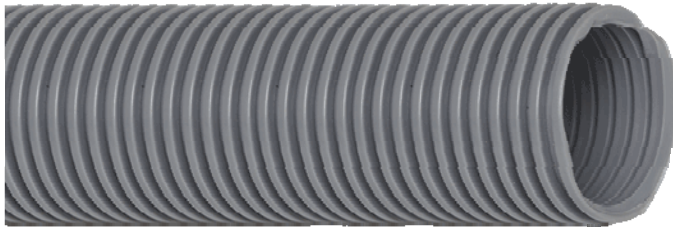

The PV3 is a light weight polyethylene copolymer hose reinforced with an integral polyethylene helix.


It has a smooth interior to assure efficient air flow, and is flexible even at low temperatures. The superior external abrasion resistance and crush resistant make it ideal for many commercial and industrial applications.

Cuffs and custom colors other than gray are also available.

Temperature range is -40F to 140F.

QTY	HOSE DIA	OAL	FITTINGS	PRESSURE	VACUUM	BEND RADIUS	COMPR RATIO	WEIGHT
	(in)	(ft)		(psi)	(in Hg)	(in)	(lbs/in)	(lbs/ft)
	1 1/4			20	29	2.5	N/A	0.16
	1 1/2			18	29	3.0	N/A	0.2
	2			15	29	3.5	N/A	0.26

**NOTES:** THE HOSE IS RATED FOR -40F TO 140F.

CUSTOMER _____ PROJECT _____ ENGINEER _____ CONTRACTOR _____ CERTIFICATION _____	
	MODEL: _____
	<b>PV3</b>
	DRAWN BY: _____ PDB 1/1/12
	<b>POLYETHYLENE VACUUM HOSE</b>