
## PH5 MATERIAL HANDLING HOSE

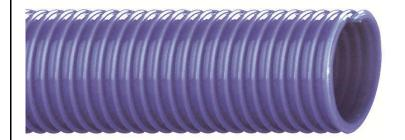

Model PH5 is a premium quality polyurethane lined material handling hose that is reinforced with a ridgid PVC helix. The extra thick polyurethane liner is ideal for when high abrasion resistance is demanded, and flexiblility is still imortant.

It provides quiet operation, good bendability, and outstanding abrasion resistance with a smooth bore. It is made for transferring and suction of dry materials, and dissipates static.

-40F to 150F.

QT Y	INNER DIA	OAL	FITTINGS	OUTER DIA	PRESS	VAC	BEND RADIUS	WEIGHT
1	(in)	(ft)		(in)	(psi)	(in Hg)	(in)	(lbs/ft)
	2			2.43	40	FULL	4	0.6
	3			3.70	40	FULL	6	1.3
	4			4.80	35	FULL	10	2.1
	5			5.80	35	28	15	2.6
	6			6.87	30	28	18	3.9

NOTES: \*THE HOSE IS RATED FOR -40 TO 150 DEG F.

CUSTOMER PROJECT ENGINEER	HOSECRAFT		
CONTRACTOR	 MODEL:	PH5	
CERTIFICATION	 DRAWN BY: PDB 8/04	PVC POLYUREHTANE LINED MATERIAL HANDLING HOSE	

HOSECRAFT USA 2315 W. HUBBARD ST, CHICAGO, IL 60611

PHONE: 800-584-4168 FAX: 312-421-6327