


UD1 POLYURETHANE POTABLE WATER LAYFLAT HOSE

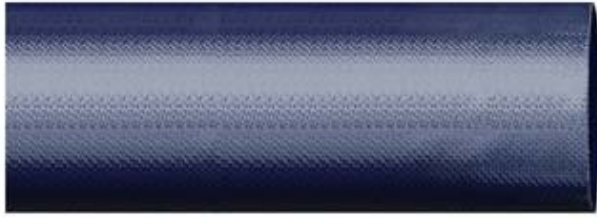

Overview: The Model UD1 is a thermoplastic polyurethane lay-flat discharge hose for NSF 61 potable water and other liquid applications requiring maximum abrasion resistance and toughness. Special high tenacity polyester yarn with a circular woven weave results in high tensile strength and low elongation. Grooved, Storz, and many other fittings available.

Features:


- Extremely tough for the harshest environments
- Up to 660 foot continuous lengths
- Easy to deploy
- Lightweight and rolls up compactly
- Very smooth inside for minimum friction loss and easy dragging.
- Meets NSF 61 for potable water

STANDARD COLORS:

- SIZES 6" AND LOWER STANDARD – BLUE
- SIZES 8" AND UP STANDARD - BLACK

Tested to ASTM D1149-64 for ozone resistance

QTY	INNER DIA	OAL	FITTINGS	WORKING PRESSURE	BURST PRESSURE	WALL THK	WEIGHT
	(in)	(ft)		(psi)	(psi)	(lbs/ft)	(lbs/ft)
	1-1/2			225	900	0.13	0.26
	2			225	900	0.13	0.34
	2-1/2			225	900	0.13	0.44
	3			175	700	0.13	0.58
	4			150	500	0.15	0.92
	5			150	500	0.15	1.20
	6			200	600	0.15	1.66
	8			200	600	0.19	2.20
	10			200	600	0.19	2.75
	12			225	450	0.21	3.60

CUSTOMER _____ PROJECT _____ ENGINEER _____ CONTRACTOR _____ CERTIFICATION _____					
	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MODEL:</td> <td style="width: 50%; text-align: center;">UD1</td> </tr> <tr> <td>DRAWN BY:</td> <td style="text-align: center;">POLYURETHANE POTABLE WATER LAYFLAT</td> </tr> </table>	MODEL:	UD1	DRAWN BY:	POLYURETHANE POTABLE WATER LAYFLAT
MODEL:	UD1				
DRAWN BY:	POLYURETHANE POTABLE WATER LAYFLAT				
	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">PDB 1/1/08</td> <td style="width: 50%;"></td> </tr> </table>	PDB 1/1/08			
PDB 1/1/08					